




EGC-H₂S-30 DATA SHEET

High H₂S Capacity Activated Carbon

EGC-H₂S-30 is a highly active pelletized carbon. Through its unique production process, it has an extremely high adsorption capacity for hydrogen sulfide and is used in control applications within wastewater treatment industries. The product also has high hardness and low pressure drop characteristics.

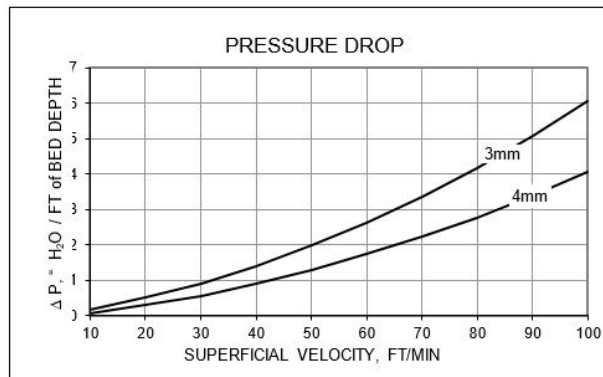

PARAMETERS	SPECIFICATIONS	TYPICAL PROPERTIES
Moisture Content (as packed), %	15	max
Apparent Density, g/cc	0.44-0.46	
Hardness, %	97	min
H ₂ S Capacity, g/cc	0.3 (66 % wt/wt)	min
CCl ₄ Activity, %	60	min
Pressure Drop @ Velocity 60 ft/min-ins wg/ft	1.5	
Particle Size	4 mm	

Standard packaging is in 28 lbs boxes or 1,100 lbs bulk bags. Other packaging is available upon request.